



ROCA Collection

FACING STONE
WITH JOINT



CRSOL
ÉMOTIONS MINÉRALES

HUES



Natural**



Bronze**



Pink
corsican**



* Non-contractual hues
** Chromatic variations (see overleaf)

PRODUCTS



Stone
Thickness 3,5 cm
Average weight: 36,4 kg/m²



Corner
L. 18,5 à 29 x w. 9 à 17 x h. 11 à 30
Thickness 3,5 cm

CHARACTERISTICS

- Elongated dry stone appearance, fine grain, soft relief
- Compatible for installation on ETI and siding
- Through-coloured
- Frost-resistant



CHROMATIC VARIATIONS

ORSOL products have varying degrees of shades from one hue to another. Refer to the following symbols for the degree of shade of each hue.



Example: the natural tone offers a richer degree of colour and patina (different shades from one stone to another) than the stone tone, which is more uniform. Variations in shade on a stone or from one stone to another inherent to the natural appearance of the products cannot be the subject of a complaint.

INSTALLATION OF FACING STONES

Download our [technical specifications](#) to identify your substrate, find out the authorised height of installation and for installation information. Only by complying with the recommendations described in this process will you be entitled to the ORSOL [10-year product guarantee](#).



TECHNICAL SPECIFICATIONS

Download the TECHNICAL SPECIFICATIONS at www.orsol.fr



Link to the document library: <https://www.orsol.fr/ressources/documenttheque>

PRECAUTIONS FOR USE

Check the conformity of the products and their packaging immediately upon receiving them, as complaints about the appearance of the products must be made before installation. Our liability is limited solely to the replacement of defective products (see our *General Terms and Conditions of Sale* available at www.orsol.fr).

In order to obtain a good aesthetic rendering, it is advisable to supply your sites in one go and to mix the contents of the different packages and pallets during their use; this mixture will reinforce the natural appearance of the products by harmonizing the colours and shades.

MAINTENANCE

Neomineral is a material of 99% mineral origin, which lives, breathes, and perspires according to its environment. To provide the facing stones with lasting protection, it is essential to **apply a water-repellent product** to limit the impact of external aggression. This treatment should be applied to a clean, dry product after installation, and may need to be **renewed every 5 years**.

Do not use high-pressure or steam cleaners, including all accessories (rotating nozzle, brush...) that may degrade the surface condition of the products.



CONSUMPTION OF INSTALLATION PRODUCTS

- **GLUE:** ORFLEX Hautes Performances: **6 kg/m²** indoors and **7 to 8 kg/m²** outdoors
- **JOINT:** Wall Joint Mortar: **6 to 6,5 kg/m²**
- **PROTECTION:** Water-repellent (outdoors or in damp rooms): **9 m²/L**

*Information given for guidance only for the selected collection of facing stones.
For more details: www.orsol.fr*



BIT.LY/ORSOL-TUTO-POSE-CAUSSE

LAYOUT OF THE ROCA COLLECTION



Je pose en croisant les joints d'une rangée sur l'autre



Je réalise les joints





Je brosse et j'hydrofuge

Calepinage = Façon de disposer les éléments de parement pour obtenir un ensemble harmonieux.

LAYOUT OF CORNERS:

- The corners must be installed **before** the facing stone. They must be glued at a rate of 1 linear metre per day.
- Glue the corners from bottom to top, swapping short and long sides from one row to the next and leaving a joint of 1 to 2 cm between each corner.


CALEPINAGE DES PAREMENTS :

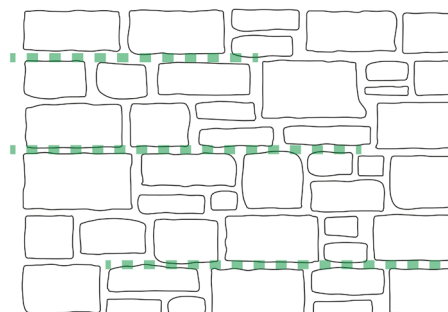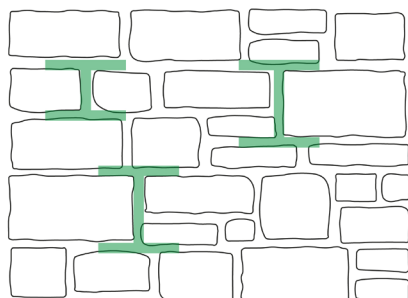

- Glue the facing stones from bottom to top in rows 2 or 3 high, criss-crossing the facing stones from one row to the next to avoid vertical joints and leaving a space of 1 to 2 cm between the facing stones.

- Continue the facing stone wall along its entire length in the same way.

- Proceed with the jointing

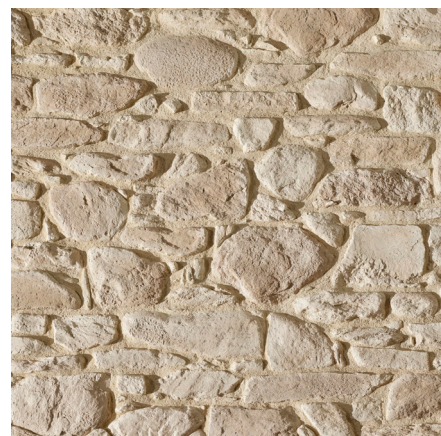

POUR COMMANDER

	Reference			Packaging		Average weight (kg)	
	Natural	Bronze	Pink Corsican	Packaging	Pallet	Package	Pallet
Facing Stone	ROC5	ROC14	ROC9	1 package (± 0,5 m ²)	48 packages (± 24 m ²)	18,30	906
Corner	PAROCATN	PAROCAH	PAROCACR	1 package (± 1 ml)	32 packages	20,60	679

* joint included of ± 2 cm

NOTE: We recommend that you supply the site all at once to ensure uniformity of the hues.