




INCERTO Collection


FACING STONE
WITHOUT JOINT




CRSOL
ÉMOTIONS MINÉRALES

HUES



Shaded beige** 



Bronze** 

PRODUCTS



Facing stone
L. 49 x h. 30
Thickness 3,5 cm
Average weight: 43,6 kg/m²

* Non-contractual hues
** Chromatic variations (see overleaf)


CHARACTERISTICS

- Assembly of facing stones of irregular shapes and formats
- Stone to stone layout on a backing mesh for quick and easy installation
- Bonding and nesting with a simplified installation diagram
- Through-coloured
- Frost-resistant



CHROMATIC VARIATIONS

ORSOL products have varying degrees of shades from one hue to another. Refer to the following symbols for the degree of shade of each hue.

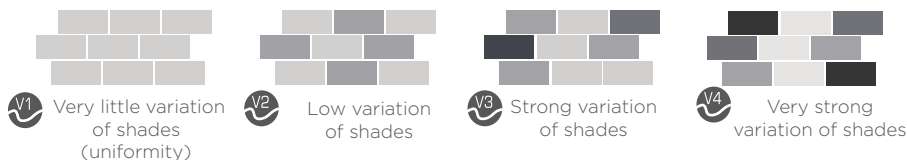

Example: the natural tone offers a richer degree of colour and patina (different shades from one stone to another) than the stone tone, which is more uniform. Variations in shade on a stone or from one stone to another inherent to the natural appearance of the products cannot be the subject of a complaint.

INSTALLATION OF FACING STONES

Download our [technical specifications](#) to identify your substrate, find out the authorised height of installation and for installation information. Only by complying with the recommendations described in this process will you be entitled to the ORSOL [10-year product guarantee](#).



TECHNICAL SPECIFICATIONS

Download the TECHNICAL SPECIFICATIONS at www.orsol.fr



Link to the document library: <https://www.orsol.fr/ressources/documenttheque>

PRECAUTIONS FOR USE

Check the conformity of the products and their packaging immediately upon receiving them, as complaints about the appearance of the products must be made before installation. Our liability is limited solely to the replacement of defective products (see our *General Terms and Conditions of Sale* available at www.orsol.fr).

In order to obtain a good aesthetic rendering, it is advisable to supply your sites in one go and to mix the contents of the different packages and pallets during their use; this mixture will reinforce the natural appearance of the products by harmonizing the colours and shades.

MAINTENANCE

Neomineral is a material of 99% mineral origin, which lives, breathes, and perspires according to its environment. To provide the facing stones with lasting protection, it is essential to **apply a water-repellent product** to limit the impact of external aggression. This treatment should be applied to a clean, dry product after installation, and may need to be **renewed every 5 years**.

Do not use high-pressure or steam cleaners, including all accessories (rotating nozzle, brush...) that may degrade the surface condition of the products.



CONSUMPTION OF INSTALLATION PRODUCTS

- **GLUE:** ORFLEX Hautes Performances: **7 to 8 kg/m²** indoors and **8 to 10 kg/m²** outdoors
- **PROTECTION:** Water-repellent (outdoors or in damp rooms): **9 m²/L**

*Information given for guidance only for the selected collection of facing stones.
For more details: www.orsol.fr*



BIT.LY/ROCA_ROBERTLONGECHAL

LE CALEPINAGE DE LA COLLECTION INCERTO



I apply a thin layer of adhesive to the back side of the facing



I apply adhesive to the facing stones in a double layer according to the layout shown in detail below



I remove any excess adhesive and I apply water-repellent outdoors and in wet rooms

Layout = Way of arranging the facing stone elements to obtain a harmonious whole.


LAYOUT OF CORNERS:

- The INCERTO collection does not include a corner accessory. However, corners can be made using the facing stone. Please refer to the technical specifications: handling of specific points.
- The corners must be installed before the facing stone. They must be glued at a rate of 1 linear metre per day.

LAYOUT OF FACING STONES:

- This facing stone is laid using a simple, regular layout that guarantees a wall with an attractive, natural appearance.
- Each backing mesh includes facing stones of different shapes, sizes and hues.
- Each backing mesh can be rotated independently to multiply the patterns.
- Before beginning to apply adhesive, we advise that you carry out a trial installation on the floor, in order to properly distribute the meshes to harmonize the colours and shades.


IMPORTANT : The INCERTO collection is composed of 2 shapes of backing meshes that will be alternately placed on the same row in height.

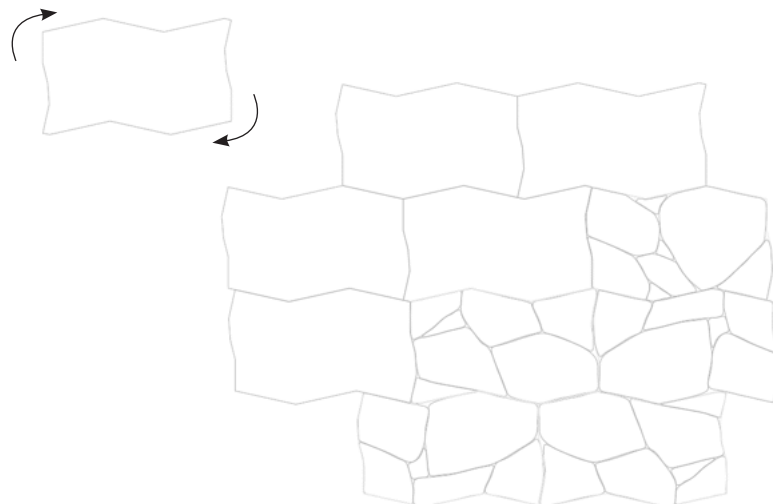

The INCERTO collection does not include a corner accessory. However, if your wall has corners that need to be dressed, these can be done using the facing. For their installation, please refer to the Technical Specifications.

- For starting in the corner: cut a backing mesh in its length and height and position the retained part (A_1) in the corner in the lower part.
- For the first row at the foot of the wall: cut the meshes in their length and position them while alternating ($B' \Rightarrow A' \Rightarrow B' \Rightarrow \dots$) along the entire length of the wall.
- Continue laying vertically, aligning the meshes alternately ($A \Rightarrow B \Rightarrow A \Rightarrow \dots$), starting the row with a mesh (B) cut to length and positioned at the corner of the wall.

Backing mesh parts A_2 and B_2 are to be carried over to the 2nd façade to complete the creation of the corner of the walls.

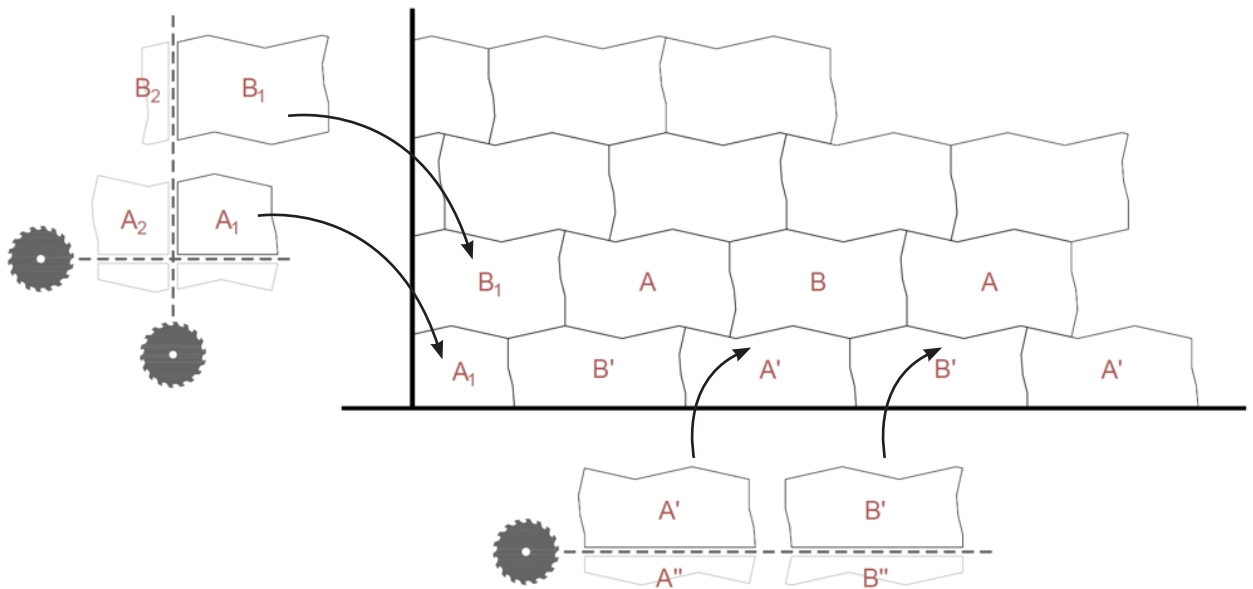

Parts A'' and B'' are kept for use at the top of the wall.

TO ORDER

| Reference | | Packaging | | Average weight (kg) | |
|--------------|--------------|-----------|--|---|--------|
| | | Package | Pallet | Package | Pallet |
| Facing stone | Shaded beige | Bronze | | | |
| | INCBN | INCTB | 1 package = 2 panels ($\pm 0,25 \text{ m}^2$) | 72 packages ($\pm 18 \text{ m}^2$) | 10,80 |

NOTE: We recommend that you supply the site all at once to ensure uniformity of the hues.